## **SB004** 300X300X100 **Grade A** BS 5834-2

## **Multi**Grip<sup>™</sup> Ductile Iron Surface Box ecclesutilities®





Capable of being used in carriageways and other areas carring fast moving, normal commercial vehicles with wheel loads up to 5 tonnes and slow moving, specially authorised vehicles with wheel up to 11.5 tonnes.


## **OPTIONAL EXTRAS:**


**Badged** 



<b>Product Code</b>	Clear Opening	Base Size	Depth
SB004	300mm x 300mm	407mm x 407mm	100mm

### **FEATURES:**











Recyclable - Long life asset with high



Mortar Level Indicator - Shows when the



QR Code Mobile Friendly - Clear, easy-to -



Indicator Coating Layer - Black coated



**Three Point Suspension - Three point** 



Closed Keyway - Prevents increase of dirt



## **SB004** 300X300X100 **Grade A** BS 5834-2

## **Multi**Grip<sup>™</sup> Ductile Iron Surface Box ecclesutilities®





Capable of being used in carriageways and other areas carring fast moving, normal commercial vehicles with wheel loads up to 5 tonnes and slow moving, specially authorised vehicles with wheel up to 11.5 tonnes.

### **DATA**

#### **Dimensions**

A/ Base Size: 407mm x 407mm

B/ Clear Opening: 300mmx300mm

C/ Depth: 100mm

#### **Materials**

**Ductile Iron** 

#### **Finish**

**Black Coated** 

#### Certification

**BSI Kitemark** 

#### Standard


BS 5834-2

#### **Product Type**

Ductile Iron Surface Box

# **Smart**Grip

Disclaimer: Eccles (UK Foundries FE) Ltd are continually seeking to improve our products and we therefore reserve the right to alter product specifications without prior notice. It is the responsibilitry of all users to ensure that the above product data is current. Installation details are available on request. It is always recommended that the use of road plates be used where access covers, gully grates and frames are exposed to construction and site traffic during the construction phase of any project and in accordance with "Annex F" EN124\_1:2015

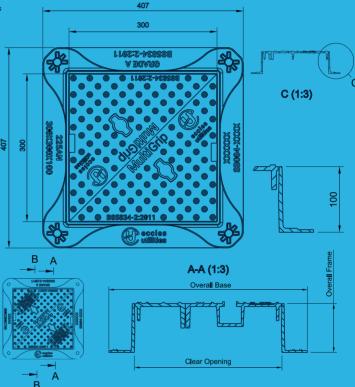



**B** CLEAR OPENING

C FRAME DEPTH

