

SB005

380X230X125

Grade A BS 5834-2

MultiGrip™

Ductile Iron Surface Box



ecclesutilities®



Capable of being used in carriageways and other areas carrying fast moving, normal commercial vehicles with wheel loads up to 5 tonnes and slow moving, specially authorised vehicles with wheel up to 11.5 tonnes.

OPTIONAL EXTRAS:

- **Badged**



Product Code	Clear Opening	Base Size	Depth
SB005	380mm x 230mm	488mm x 338mm	125mm

* Single Lid Wedge Seated

FEATURES:



SmartGrip Technology™ - Unique pattern design provides a friction value of >70 (UKAS Accredited 3rd Party).



Recyclable - Long life asset with high recyclability contributing to the reduction in carbon footprint.



Indicator Coating Layer - Black enamel finished with optional yellow indicator coating.



Ratio - Ductile iron for improved weight to strength ratio.



Mortar Level Indicator - Shows when the minimum level of bedding mortar has enveloped the frame.



Open Keyway - Facilitates easy access to the services below.



Strong & Durable - Spheroidal graphite cast iron according to EN 1563:2018, as per the requirements of BS EN12423:2015.



QR Code Mobile Friendly - Clear, easy to use QR Code to access installation instructions.



Indexed Lid - Provides one-way fitting.



Wedged Seated - The cover features our centring wedge seating and indexes which ensures the cover is always fitted correctly.

eccles®
Intelligent Access & Drainage Solutions™

+44 (0)1922 613 222
enquiries@ecclesproducts.com
www.ecclesproducts.com

Eccles (UK Foundries FE) Limited
Portland Street, Walsall,
West Midlands, WS2 8AA, UK

SB005

380X230X125

Grade A BS 5834-2

MultiGrip™

Ductile Iron Surface Box ecclesutilities®



Capable of being used in carriageways and other areas carrying fast moving, normal commercial vehicles with wheel loads up to 5 tonnes and slow moving, specially authorised vehicles with wheel up to 11.5 tonnes.

DATA

Dimensions

A/ Base Size: 488mm x 338mm

B/ Clear Opening: 380mmx230mm

C/ Depth: 125mm

Materials

Ductile Iron

Finish

Black Coated

Standard


BS 5834-2

Product Type




Ductile Iron Surface Box

Additional Feature

Smart Coat

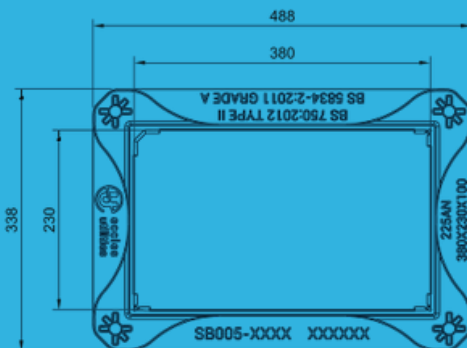

C
(1:3.5)

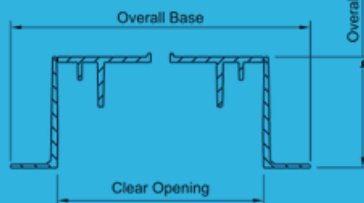

SmartGrip™

Technology

Disclaimer: Eccles (UK Foundries FE) Ltd are continually seeking to improve our products and we therefore reserve the right to alter product specifications without prior notice. It is the responsibility of all users to ensure that the above product data is current. Installation details are available on request. It is always recommended that the use of road plates be used where access covers, gully grates and frames are exposed to construction and site traffic during the construction phase of any project and in accordance with "Annex F" EN124_1:2015

DIAGRAM KEY: **A** BASE SIZE

B CLEAR OPENING

C FRAME DEPTH

eccles®

Intelligent Access & Drainage Solutions™

+44 (0)1922 613 222
enquiries@ecclesproducts.com
www.ecclesproducts.com

Eccles (UK Foundries FE) Limited
Portland Street, Walsall,
West Midlands, WS2 8AA, UK